REVISIONS		
NO.	BY	DESCRIPTION
△		
△		

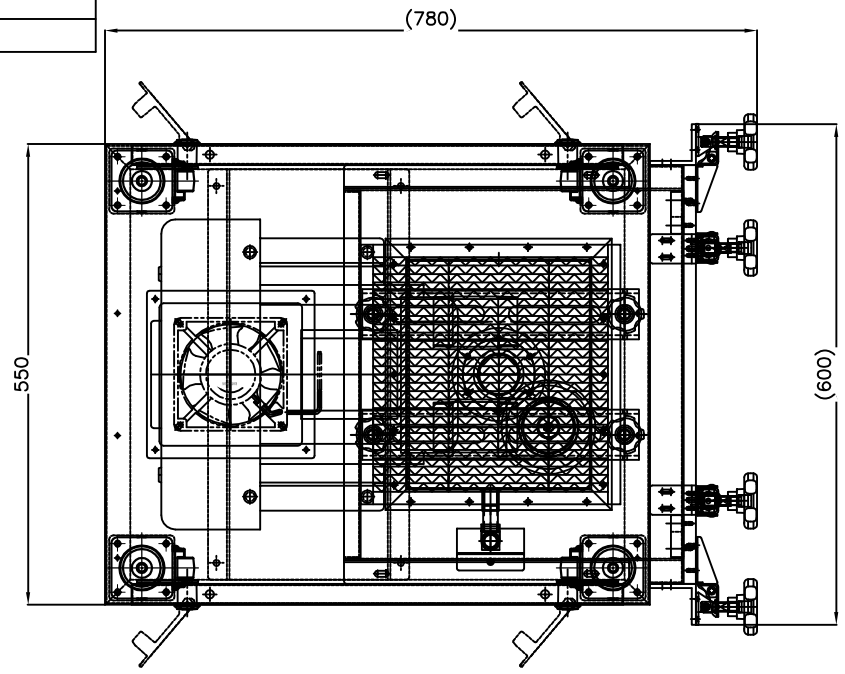

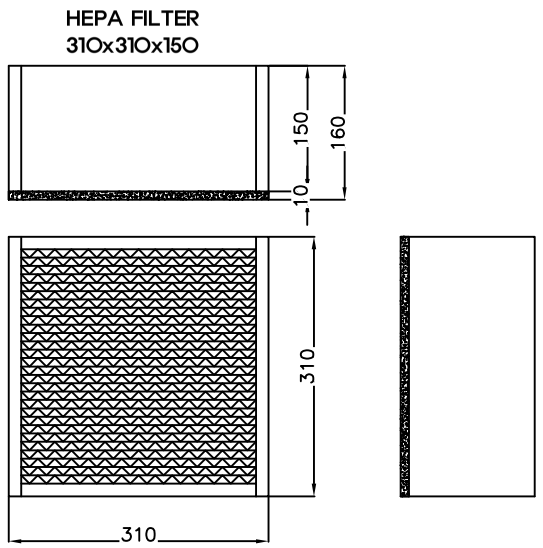

기본사양

형식	이동식 소음방지박스
모델명	SB560-S-H
적용링브로워	5Hp~6Hp 1단
소음감소	max.10dB(A)
재질	일반 분체도장품 또는 스텐레스
흡음재	난연흡음재 50T
미압계	75ø A-Type 0~5000mmAq
흡입필터	50A 메쉬+타공 2중 일반필터 내장
쿨링펜	120/DC24V(결선 고객시공)
헤파필터	310x310x150 H13등급(99.75%)
중량	abt.90kg (링브로워 포함)

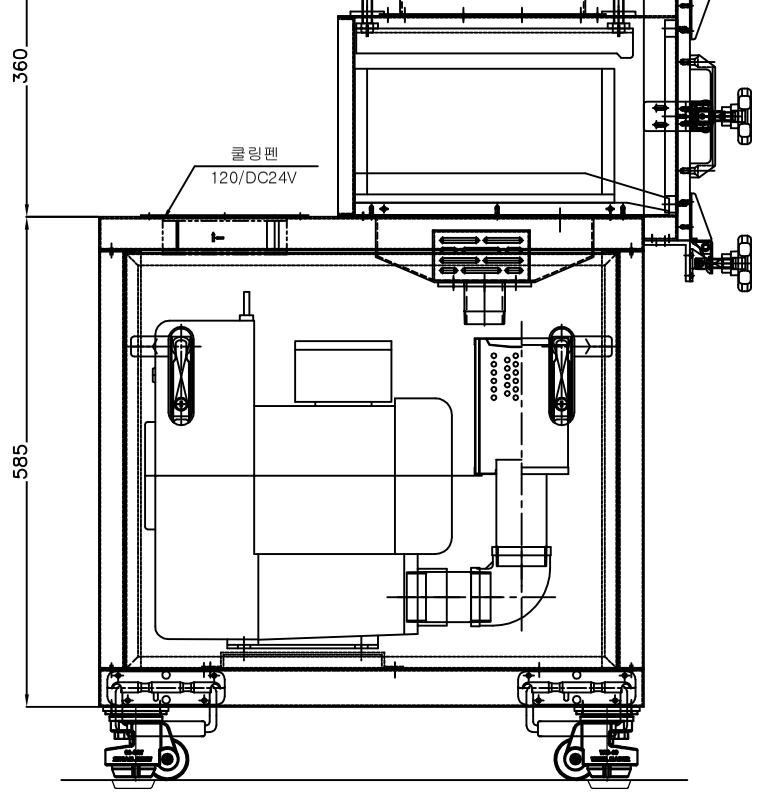

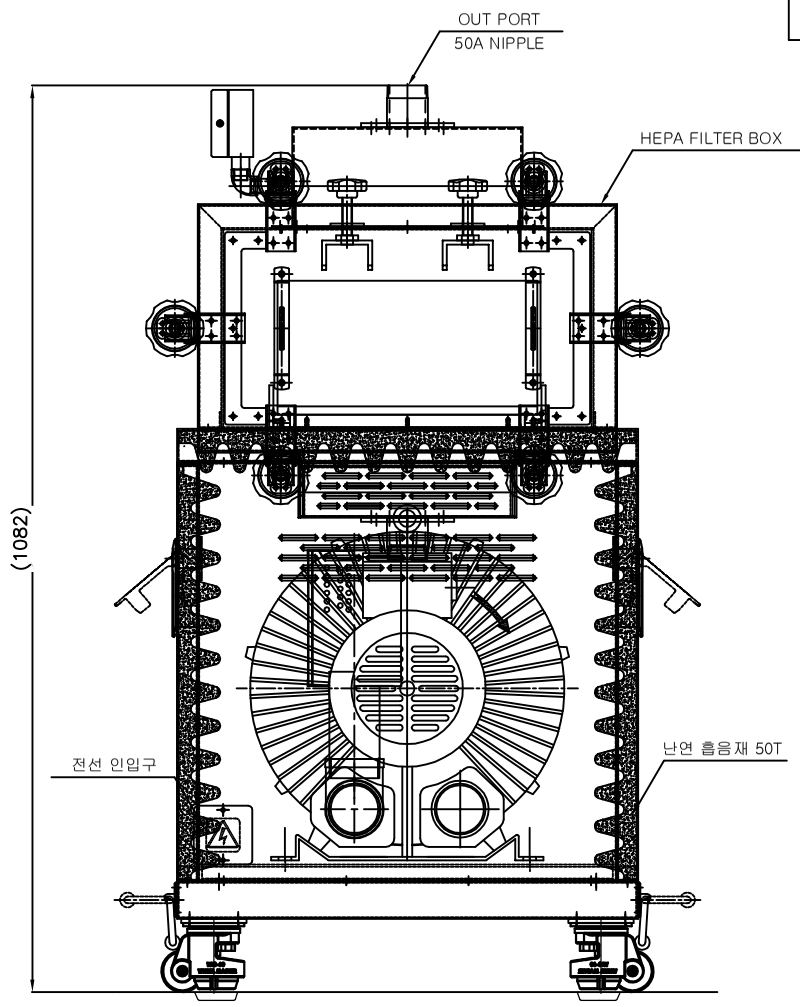

※ 소음측정기준은 본사현장 60dB 기준 소음에서
제품과 1.5M 거리를 두고 측정 출고 합니다.
※ 설치환경에 따라 다소 dB 차이가 있습니다.
※ 품질향상에 따른 설계변동 가능함.

COMMERCIAL TOLERANCE(mm)			
MACHINING		CANNING	
DIMENSION	TOL	DIMENSION	TOL
1~4	±0.1	less than 250	±1.5
4~16	±0.2	250~500	±2.0
16~63	±0.3	500~1000	±3.0
63~250	±0.5	1000~2000	±4.5
250~1000	±0.8	2000~4000	±6.0
1000~2000	±1.0	4000~8000	±8.0
2000~5000	±1.5		

COMPARISON OF SURFACE ROUGHNESS			
RANGE OF SURFACE ROUGHNESS(u)			
100-S	25-S	6.3-S	
HEAT TREATMENT		PROJECTION	

NO	DESCRIPTION	SPECIFICATION	Q'TY	MATER'L	WEIGHT	REMARKS
DATE	2017.02	WEIGHT Kg	SCALE	1 / 1	CUSTOMER	
DRAWN BY	DESIGNED BY	CHECKED BY	APPROVED BY		TITLE	LAYOUT ASS'Y
MB Co., Ltd. h. D. M 2017. 02						5HP-6HP 소음방지박스+헤파박스
Moobico.,Ltd.					DRAWING NO.	SBH-56S-000
					REV	△

A2(594X420)

(SCALE 1:1)